



ALFRED NZO
DISTRICT MUNICIPALITY

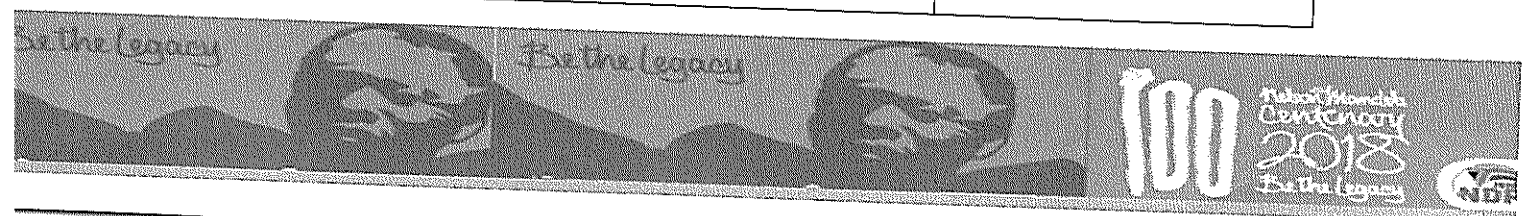
Infrastructure Development and Municipal Services SPECIFICATION

Enquiries: K Gogela

Ext: 5264

The order to be issued as per the specification below:

ITEM NO.	DESCRIPTION OF ITEM	QUANTITY
1.	Earthworks	
1.1	Excavate trenches to a dept. of 0.85mm	1800
1.2	Backfilling of trenches with excavated trench bottom materials.	1800
2	Piping	
2.1	Supply and install with compression fittings 50mm HDPE piping from springs, tanks to taps.	1300
2.2	Supply and install with compression fittings 20mm HDPE piping.	500
3	Standpipes	
3.1	Supply and install with 1M ² concrete base in 110mm encased 20mm standpipe with brass gate valve and compression fittings.	4
4	Storage	
4.1	Cast 2 x 1.8 x 100mm concrete slab with smooth steel floated finish. Install tie down points cast into concrete to hold 2 x 5000 liter jojo tanks.	1



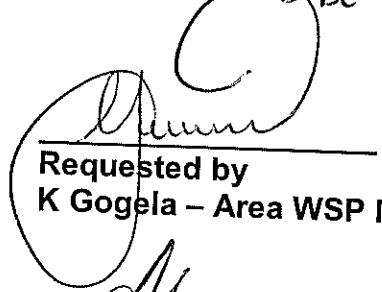


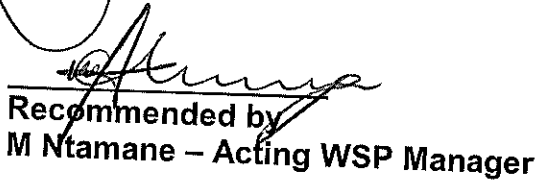
ALFRED NZO
DISTRICT MUNICIPALITY

Infrastructure Development and Municipal Services SPECIFICATION

5	Spring	
	Construct spring weir with box 1.2 x 1 x 0.800mm from 10MPA strength concrete. Spring box to include ANDM approved cast iron lockable frame and lid with padlock.	1

NB ALL BIDDERS SHOULD BE REGISTERED TO CIDB WITH A MINIMUM OF 1GB ONLY


Requested by
K Gogela – Area WSP Manager (Umzimvubu)


Recommended by
M Ntamane – Acting WSP Manager

Approved / Not Approved


Senior Manager: IDMS
X. Masiza

